

- Suitable for use in wet (outdoor direct rain) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards
- Fixture is Dark Sky compliant and engineered to minimize light glare upward into the night sky
- 5-year finish warranty
- The Coastal Elements Collection offers versatile designs, constructed of composite materials and coated with anti-fading finishes, for maximum durability in harsh climates
- Angular lines, a bold finish and robust details create an industrial edge to add flair to any type of facade

FORGE

12071BK

LARGE POST TOP OR PIER MOUNT LANTERN

Inspired by a lighting industry staple barn light, Forge features a practical outdoor lighting solution to withstand the elements. Whether it is enduring harsh sunrays, extreme cold or continuous salt air, Forge is built to last with an industrial chic flair. Part of the Coastal Elements Collection, Forge is available in a variety of anti-fading finishes that are resistant to rust and corrosion with a 5-year warranty.

DETAILS	
FINISH:	Black
MATERIAL:	Composite
DIMMABLE:	No

DIMENSIONS	
WIDTH:	16"
HEIGHT:	22"
DEPTH:	21.3
WEIGHT:	4lb

LIGHT SOURCE	
LIGHT SOURCE:	Socketed
WATTAGE:	1-14w Med. LED, 100w Equiv.
VOLTAGE:	120v

SHIPPING	
CARTON LENGTH:	24.8
CARTON WIDTH:	18.5
CARTON HEIGHT:	11
CARTON WEIGHT:	6.9









- Mounting hardware is hidden on the back plate to ensure a clean silhouette
- Suitable for use in wet (outdoor direct rain) locations as defined by NEC and CEC. Meets
 United States UL Underwriters Laboratories & CSA Canadian Standards Association Product
 Safety Standards
- Suitable for use in both interior and outdoor spaces.
- Meets California Energy Commission Title regulations/JA8 when using the included LED bulb
- 2-year finish warranty
- LED Bulbs carry a 3-year limited warranty
- Bold lines and a clean, minimalist style complement contemporary architecture

SILO

13595BK-LL

MEDIUM WALL MOUNT LANTERN

The perfect addition to Modern Coastal, Silo's compact design blends simple and long-lasting practicality. Built to stand up to harsh climates and available in three rust and corrosion-resistant finishes, Silo is available in a downlight-only option to meet dark sky compliance, an up and downlight for additional wall washing, and a small flush mount.

DETAILS	
FINISH:	Black
MATERIAL:	Composite
GLASS:	Etched Lens
DIMMABLE:	YES - CL TYPE DIMMER (SSL7A)

DIMENSIONS	
WIDTH:	6.3"
HEIGHT:	16"
WEIGHT:	4.9lb
BACK PLATE:	4.25"W X 7.125"H
EXTENSION:	7.8"
TOP TO OUTLET:	8"

LIGHT SOURCE	
LIGHT SOURCE:	Socketed
LED NAME:	6.5WR20-30K
WATTAGE:	2-8w Med. LED *Included
VOLTAGE:	120v
COLOR TEMP:	3000
CRI:	90
INCANDESCENT EQUIVALENCY:	1 x 50w
DIMMABLE:	YES - CL TYPE DIMMER (SSL7A)

SHIPPING	
CARTON LENGTH:	10
CARTON WIDTH:	9
CARTON HEIGHT:	19
CARTON WEIGHT:	6.6



Toll Free: 1 (800) 446-5539



- A wiring kit and ground spike are supplied
- Suitable for use in wet (outdoor direct rain) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards
- For more information on how to control your landscape lighting via the Hinkley Home Automation App, click here.
- LED Bulbs carry a 3-year limited warranty
- Sophisticated and streamlined design, durable construction and a timeless finish complement any architectural style

SPRINGFIELD

16022BK-LL

SMALL CLASSIC LED PATH LIGHT

DETAILS	
FINISH:	Black
MATERIAL:	Aluminum
DIMMABLE:	YES, WITH MLV ON TRANSFORMER PRIMARY

DIMENSIONS	
WIDTH:	8"
HEIGHT:	16"
DEPTH:	8
WEIGHT:	4lb

LIGHT SOURCE	
LIGHT SOURCE:	Socketed
LED NAME:	00T3-27LED-1.5
VOLTAGE:	12v
VOLT AMPS:	1.8
COLOR TEMP:	2700
LUMENS:	150
CRI:	90
INCANDESCENT EQUIVALENCY:	1 x 25w
DIMMABLE:	YES, WITH MLV ON TRANSFORMER PRIMARY
TRANSFORMER REQUIRED:	Yes

MOUNTING	
LEAD WIRE:	1 X 36"

SHIPPING	
CARTON LENGTH:	22
CARTON WIDTH:	8.5
CARTON HEIGHT:	6.3
CARTON WEIGHT:	7





- Mounts flush on a surface
- Suitable for use in wet (outdoor direct rain) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards
- Rated for both indoor and outdoor use
- · ADA compliant
- A wiring kit is supplied
- Easy and efficient installation: fewer fixtures illuminate a more extensive area, offering a diverse range of mounting opportunities.
- For more information on how to control your landscape lighting via the Hinkley Home Automation App, click here.
- LED integrated components carry a 10-year limited warranty

TAPER

1557BZ

TAPER DECK SCONCE 12V WIDE HORIZONTAL

Seamlessly blending into architectural elements inside or outside the home, the Taper series beautifully illuminates stairs, walkways, or patio spaces, enhancing the outdoor lighting experience. Made of aluminum and featuring an etched glass lens, this sconce mounts flush to the surface and includes an integrated LED light for over 40,000 hrs of light. This low-voltage fixture is practical and safer, especially in an outdoor setting. Expand time spent in outdoor living spaces and increase safety and security. Available in three classic finishes: Bronze, Satin Black, and Satin White.

DETAILS	
FINISH:	Bronze
MATERIAL:	Aluminum
GLASS:	Etched
DIMMABLE:	YES, WITH MLV ON TRANSFORMER PRIMARY

DIMENSIONS	
WIDTH:	8"
HEIGHT:	3"
DEPTH:	1
BACK PLATE:	8"W X 3"H
EXTENSION:	1"

LIGHT SOURCE	
LIGHT SOURCE:	Integrated LED
LED NAME:	ETP25
VOLTAGE:	12v
VOLT AMPS:	3
COLOR TEMP:	2700
LUMENS:	300
CRI:	90
INCANDESCENT EQUIVALENCY:	1 x 25w
DIMMABLE:	YES, WITH MLV ON TRANSFORMER PRIMARY
TRANSFORMER REQUIRED:	Yes

MOUNTING	
LEAD WIRE:	1 X 60"

SHIPPING	
CARTON LENGTH:	3.4
CARTON WIDTH:	1.4
CARTON HEIGHT:	8.5

PHONE: (440) 653-5500

Toll Free: 1 (800) 446-5539






LED – DECOSTRING SERIES

SUSPENDED DECORATIVE STRINGLIGHT SYSTEMS





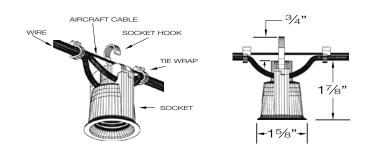

SOCKET, WIRE & CABLE DETAILS

Decostrings are a perfect accent lighting solution to add a personal ambience to patios, courtyards, atriums, restaurants, amusement parks and any open area. The "festoon" lighting system is typically strung between two anchorage points with optional intermediary support and electrically fed from one end. The sockets can be either symmetrically spaced or randomly spaced to suit the application. Optional shades, guards and lenses complete the architectual design.

SPECIFICATIONS

LAMPHOLDER Black phenolic, medium base UL weatherproof with hook for optional mounting.

POWER CORD 12/2 G. Black flexible duplex cable, UV rated for extended outdoor use.

SUPPORT CABLE 3/32" SS aircraft catenary cable supports the system, 980# test. Heavier cable available.

TERMINATION KITS Heavy duty stainless steel hardware available.

LAMPS Wet location rated LED and incandescent medium base A, G or S style lamps.

DIMMING Dimmable to 10% with ELV trailing edge type dimmers.

VOLTAGE 120V system (1920 watts max load). No driver or transformer required.

ACCESSORIES Optional brass, aluminum and acrylic shades. Consult factory for custom shades.

Bare lamp and shielded "BUG" rated .IES files available. **PHOTOMETRY**

ETL listed for permenant damp or wet installations. CERTIFICATION



MADE IN THE USA

PART NUMBER

DSD DAMP DSW WFT

12 12"O/C 18 18"O/C

24 '24"O/C

36 36"O/C

48 48"O/C

120 120V

SELECT **FROM** LAMP PAGE 3

OPTIONAL SELECT FROM PAGE 4 & 5

OR

LEAVE BLANK

SPECIFY

STANDARD TERMINATION KIT LTK

OPTIONAL

STK

LIGHTWEIGHT TERMINATION KIT

TBK TURNBUCKLE KIT (SEE PAGE 6)

(OTHER, SPECIFY)



LED FILAMENT STYLE LAMPS



S14-24/150 - 24K,1.5W, 150L, CLEAR S14-27/150 - 27K,1.5W, 150L, CLEAR

WHITE OR FROSTED - CONSULT FACTORY



VINTAGE LED LAMPS CONSULT FACTORY



G16.5F-24/325 - 24K, 3.5W, 325L, CLEAR G16.5F-27/325 - 27K, 3.5W, 325L, CLEAR

G16.5F-24/200 - 24K, 2W, 200L, CLEAR G16.5F-27/200 - 27K, 2W, 200L, CLEAR

WHITE OR FROSTED - CONSULT FACTORY



CONSULT FACTORY



S14 VARIOUS COLORS CONSULT FACTORY



CONSULT FACTORY

* ADD "SC" SUFFIX FOR SILICONE COATING (FOOD SERVICE)

* SEE INDIVIDUAL DATA SHEETS FOR COMPLETE LAMP SPECIFICATIONS

* LED LAMPS SPECIFICALLY WET RATED AND DIM DOWN TO 10% WITH A TRAILING EDGE (ELV) DIMMER.

INCANDESCENT LAMPS (OPTIONAL)









FULL SPECIFICATION SHEETS AVAILABLE AT PRIMUSLIGHTING.COM.



DECOSTRING SHADES & GUARDS

DSC7 7" W X 3" H CONE SHADE 6 OZ

DSC10 10" W X 3" H CONE SHADE 9 OZ

DSC12 12" W X 4" H CONE SHADE 18 OZ

FINISH: ACID ETCHED BRASS OR POWDER COAT

PROVIDES 0/0/0 BUG RATING



SHOWN: AGED BRASS (AB)

DSH4 4" W X 1 7/8" H HAT SHADE 2 OZ

DSH6 6" W X 2 1/4" H HAT SHADE 4 OZ

DSH8 8" W X 2 3/4" H HAT SHADE 6 OZ

FINISH: ACID ETCHED BRASS OR POWDER COAT

FACTORY INSTALLED





SHOWN: VERDE BRASS (VB)

DSRW4 4" W X 1 7/8" H RADIAL WAVE SHADE 2 OZ

DSRW6 6" W X 2 1/4" H RADIAL WAVE SHADE 4 OZ

DSRW8 8" W X 2 3/4" H RADIAL WAVE SHADE 6 OZ

FINISH: ACID ETCHED BRASS OR POWDER COAT

FACTORY INSTALLED





SHOWN: POWDER COAT BLACK (PCB)

DST4P 4" W X 6" H PERFORATED TUBE SHADE 11 OZ

DST6P 6" W X 8" H PERFORATED TUBE SHADE 22 OZ

FINISH: ACID ETCHED BRASS OR POWDER COAT





SHOWN: RAW (RB)

DST4C 4" W X 6" H WIRE CAGE TUBE 9 OZ

DST6C 6" W X 8" H WIRE CAGE TUBE 15 OZ

FINISH: ACID ETCHED BRASS OR POWDER COAT





SHOWN: AGED BRASS (AB)

DSRG 6" W X 5 1/8" H

FACTORY INSTALLED

ROUND SHADE WITH GUARD

FINISH: ACID ETCHED BRASS OR POWDER COAT

* DELETE "G" FOR NO GUARD.





SHOWN: CUSTOM TEXTURED BRONZE

DSWG 3 7/8" W X 5 5/8" H

WIRE GUARD

FINISH: CAD PLATED OR POWDER COAT BLACK

CAN BE USED WITH CONE SHADE DSC10, DSC12





SHOWN: POWDER COAT BLACK (PCB)

9 OZ

6 OZ



DECOSTRING SHADES & GUARDS

DSSLG 3 1/2" W X 4 1/2" H

ALUMINUM SQUARE LAMP GUARD

POWDER COAT OR BRUSHED ALUMINIUM



3 OZ

6 OZ



DSRLG 5" W X 4" H

FINISH:

METAL ROUND LAMP GUARD

FINISH: POWDER COAT ONLY





SHOWN: POWDER COAT SILVER (PCS)

DST3A 3" W X 6" H ACRYLIC TUBE SHADE 8 OZ

DST5A 5" W X 8" H ACRYLIC TUBE SHADE 14 OZ

FINISH: OPAL WHITE, CLEAR OR FROSTED





SHOWN: OPAL WHITE (O)

DSS8 8" DIAMETER ACRYLIC SPHERE ΟZ

10" DIAMETER ACRYLIC SPHERE **DSS10** 16 OZ

DSS12 12" DIAMETER ACRYLIC SPHERE 22 OZ

FINISH: OPAL WHITE, CLEAR OR FROSTED





SHOWN: OPAL WHITE & CLEAR (O & C)

8" DIAMETER ACRYLIC SOFT CUBE SHADE DSQ8 12 OZ

10" DIAMETER ACRYLIC SOFT CUBE SHADE **DSQ10** 20 OZ

DSQ12 12" DIAMETER ACRYLIC SOFT CUBE SHADE 26 OZ

FINISH: OPAL WHITE, CLEAR OR FROSTED






SHOWN: FROSTED (F)

SHADES & GUARDS FINISH CODES

RAW & ACID ETCHED FINISHES



AB - AGED BRASS (MOST POPULAR)



POWDER COAT FINISHES

PCW - POWDER COAT WHITE



ACRYLIC FINISHES


O - OPAL WHITE



VB – VERDE BRASS



PCB - POWDER COAT BLACK



C - CLEAR



RB - RAW BRASS



PCS - POWDER COAT SILVER



F - FROSTED



BA – BRUSHED ALUM



PCC - POWDER COAT (CUSTOM) PROVIDE RAL COLOR

SHADES & GUARDS FINISH NOTES


- Decostring shades are hand crafted from solid brass or aluminum and feature either chemical etched or powder coat finishes.
- · Most shades are shipped separately and attached to cable system with a tool-less keeper ring.
- All shades and guards dimensions are nominal.
- Please contact us for material, finish and shape variations or custom designs.




SPECIFICATIONS & GUIDELINES

Decostrings are ordered and built to specific run lengths and include 4' aircraft cable tails on each end and a 4' power lead on one end for adjustment and make-up. Order the measured length between mounting points rounded down to the nearest foot which allows for ample droop and centering adjustment. See "Installation Guide" for detailed instructions. Estimate dead weight load at 5oz/ft. for most common 24" O/C spacing. A simple straight run example is shown below resulting in a 23' run to order.

Example:



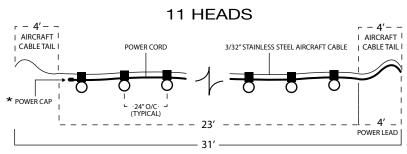

 $^{f \star}$ OPTIONAL: LEADS BOTH ENDS FOR SPLICING

TERMINATION KITS

Commercial grade heavy duty stainless steel cable termination kits. System working load 175# using standard *Decostring* 3/32" suspension cable to attach to typically a ¼" eye or mounting tab (by others). Complete hardware for both cable ends. Order (1) kit per run. Other components available.







STK
STANDARD TERMINATION KIT
For Drooped Suspension | 5/16" Gate

LIGHTWEIGHT TERMINATION KIT Maximum Working Load 30 LBS

LTK

TBK

TURNBUCKLE KIT

Only for Tensioned Suspension | 7/16" Gate

POWER CONNECTIONS

Decostrings are designed to be permanently installed and hard wired to a junction box. Customary wet location make-up includes a drip loop and mechanical termination to a weatherproof j-box using an appropriate nylon cord grip

